


MADE IN ITALY



DRY BATTERY									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes					
B222S	12	24	230	35 (25A)	4 (angular)	28NU	B0	+ right	36x4=144

TOP ENERGY EVO

Classification EN50342-1			
W2	C2	V3	E1

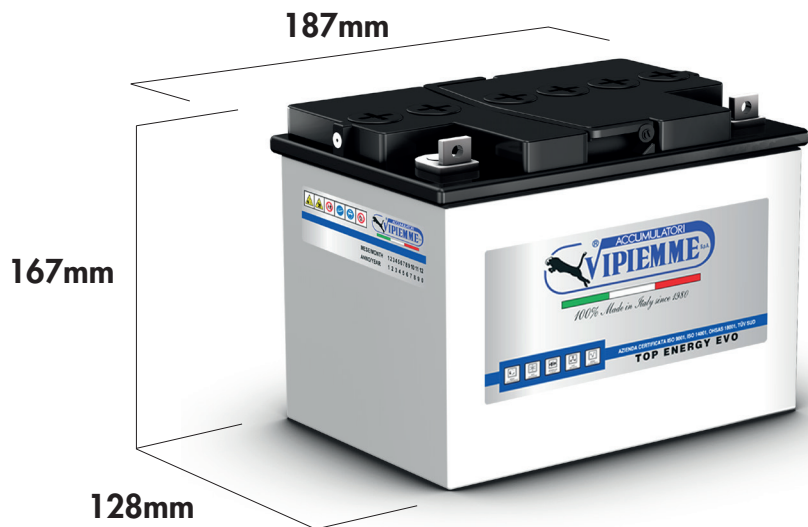

- BOX COLOUR**
 Matt white
- LID COLOUR**
 Black

TECHNICAL CHARACTERISTICS




BOX AND LID
PP



FLAMES ARRESTOR
Placed in the Lid




SULPHURIC ACID
 Density
 1.29 +/- 0,01 g/ml
 Approximate volume 1,6 l



TEMPERATURE
According to EN50342-1



BATTERY WEIGHT
5,5 ±5% Kg



PLATES
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.