


MADE IN ITALY



| FLOODED | | | | | | | | | |
|---------|---------|----------|---------------|--------------|---------------|-----------|--------------|--------|------------|
| Code | Voltage | Capacity | Cold Cranking | Res. Cap. | Terminal | Box | Bottom holds | Layout | Per Pallet |
| | V | Ah 20h | A (EN) | Minutes | Conical | | | | |
| BF140C | 12 | 140 | 950 | 270 (25A) | 1 standard | A FLAT | B0 | + left | 8x3=24 |

EFB TRUCK

| Classification EN50342-1 | | | |
|--------------------------|----|----|----|
| W3 | C2 | V4 | E3 |

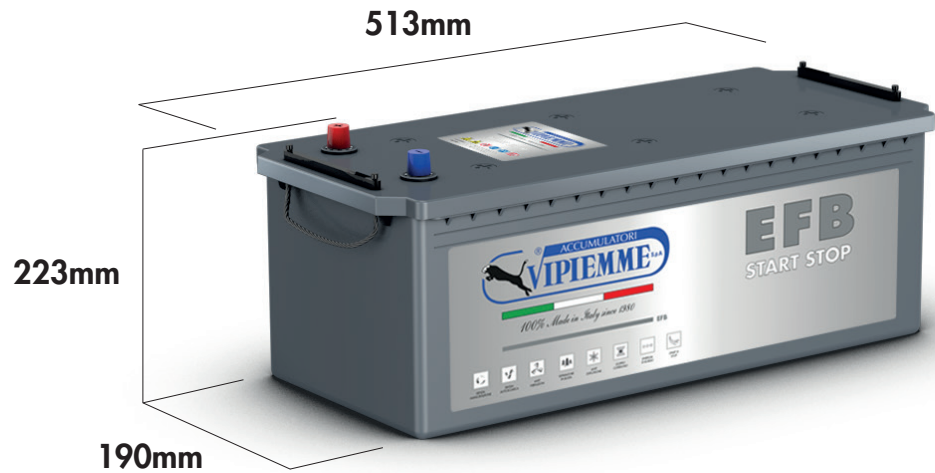


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



FLAMES ARRESTOR
Placed in the Lid




SULPHURIC ACID
Density
1,29+/- 0,01g/ml
Approximate volume 8,5 l



TEMPERATURE
According to EN50342-1



BATTERY WEIGHT
37,4 ±5% Kg



PLATES
Casted grids in Pb/Ca alloy, with the use of graphite in the negative plates to improve charge acceptance. Enveloped in PE and AGM separators.