


**MADE IN ITALY**



DRY BATTERY									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes					
B443S	12	30	300	42 (25A)	4 (angular)	28NU	B0	+ left	36x4=144

## TOP ENERGY EVO

Classification EN50342-1			
W2	C2	V3	E1

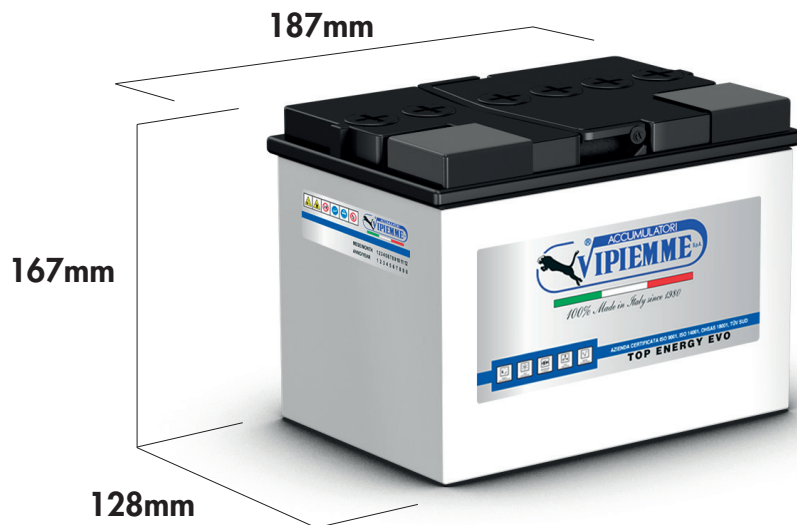

- BOX COLOUR**  
 Matt white
- LID COLOUR**  
 Black


### TECHNICAL CHARACTERISTICS




**BOX AND LID**  
PP



**FLAMES ARRESTOR**  
Placed in the Lid




**SULPHURIC ACID**  
 Density  
 1.29 +/- 0,01 g/ml  
 Approximate volume 1,6 l



**TEMPERATURE**  
According to EN50342-1



**BATTERY WEIGHT**  
6,5 ±5% Kg



**PLATES**  
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.