


**MADE IN ITALY**



FLOODED									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes	Conical				
B095C 21	12	100	800	175 (25A)	1 standard	GR28	B13	+ left	12x3=36

## TOP ENERGY TIR


Classification EN50342-1			
W3	C2	V2	E1

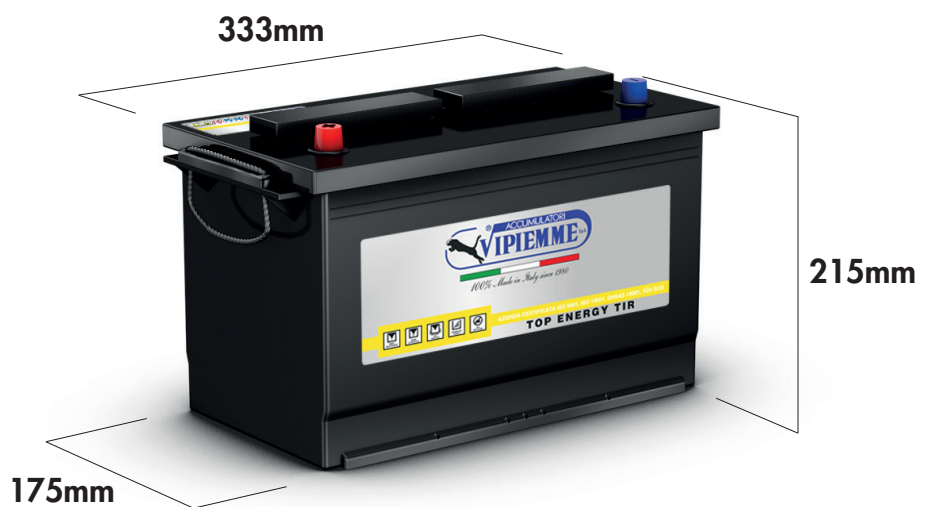


### TECHNICAL CHARACTERISTICS




**BOX AND LID**  
PP



**TEMPERATURE**  
According to EN50342-1



**SULPHURIC ACID**  
Density  
1.29 +/- 0,01 g/ml  
Approximate volume 5,3 l



**PLATES**  
Expanded grids in Pb/Ca alloy  
with enveloped positive ones in PE.



**BATTERY WEIGHT**  
23,5 ±5% Kg