


MADE IN ITALY



FLOODED									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes	Conical				
B388C	12	140	1020	270 (25A)	1 standard	MAC 110D	B3	+ left	8x3=24

SPIRIT ENERGY TIR


Classification EN50342-1			
W2	C2	V2	E1

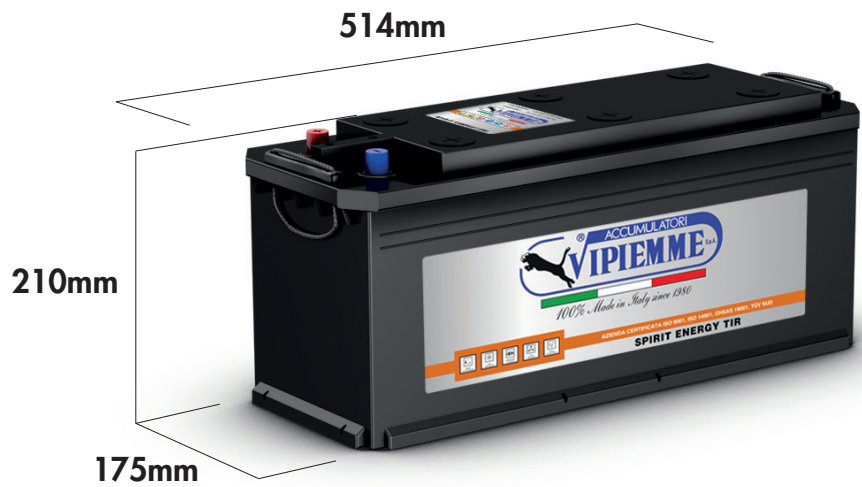


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



TEMPERATURE
According to EN50342-1



SULPHURIC ACID
Density
1.29 +/- 0,01 g/ml
Approximate volume 9,1 l



PLATES
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.



BATTERY WEIGHT
35,1 ±5% Kg